

# Saunaofen Herkules S60

## For commercial sauna

Free standing heater

**Outer shell:** The exterior design features a striking combination of straight lines, massive yet elegant steel with the raw sauna rocks.

The internal and external shell is completely made of the best quality stainless steel.

**Terminal box:** high-grade steel

**Stone filling:** 60 kg incl.

**Service friendly unit assembly system**



The heating elements are mounted on a rack and may be conveniently removed without the need to remove the rocks.

Optimised ratio of radiated heat and convection due to the appropriate amount of stones.



CE IP X4  
MADE IN GERMANY

### Connection diagram

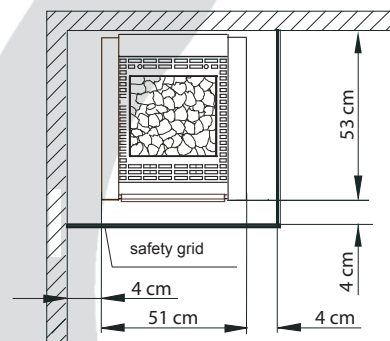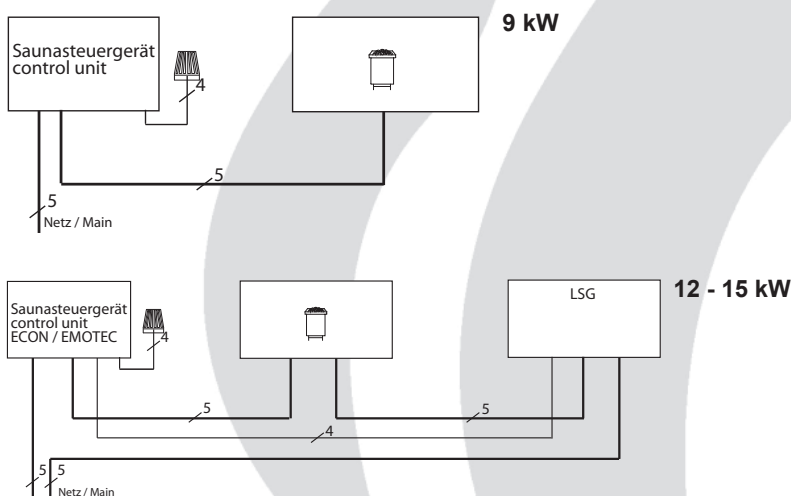

| Capacity acc. DIN | Electrical. Connection  | Fuse control unit in A | Fuse LSG in A | Connecting cable main - control unit in mm <sup>2</sup> | Connecting cable main - LSG in mm <sup>2</sup> | Connecting cable control unit - heater in mm <sup>2</sup> | Connecting cable LSG - heater in mm <sup>2</sup> | Connecting cable control unit - LSG in mm <sup>2</sup> |
|-------------------|-------------------------|------------------------|---------------|---|--|---|--|--|
| 9,0 kW            | 3N AC<br>50 Hz<br>400 V | 3 x 16                 | --            | 5 x 2,5   | 5 x 2,5  | 5 x 1,5   | --   | --   |
| 12,0 kW           |                         |                        | 3 x 16        |   |  |   | 5 x 1,5  | 4 x 1,5  |
| 15,0 kW           |                         |                        | 3 x 16        |   |  |   | 5 x 1,5  | 4 x 1,5  |

All cross sections of a line are minimum diameters in mm<sup>2</sup> (Copper line)

| Art.-No. | Outer shell                          | Capacity acc. DIN | Installation dimensions H/W/D cm | For cabin size         | Minimum dimensions of air intake and exhaust vents | Weight without stones without package | Stone filling | Power switch gear (LSG) needed | For operation with control units   |
|----------|--------------------------------------|-------------------|----------------------------------|------------------------|--|---------------------------------------|---------------|--------------------------------|--|
| 94.4493  | Grinded stainless steel / anthracite | 9,0 kW            | 85 / 51 / 53                     | 9 - 14 m <sup>3</sup>  | 35 x 6 cm  | 43 kg                                 | 60 kg         | no                             | EMOTEC DC 9000<br>EMOTEC DC 9000 DB/DL/DLF<br>EMOTEC HCS 9003<br>EMOTEC HCS 9003 DB/DL/DLF<br>EmoTouch II PB/AF/GF |
| 94.4272  |                                      | 12,0 kW           |                                  | 14 - 18 m <sup>3</sup> | 35 x 7 cm  |                                       |               | EMOTEC L09                     |  |
| 94.4273  |                                      | 15,0 kW           |                                  | 18 - 25 m <sup>3</sup> | 35 x 9 cm  |                                       |               |                                |  |

Subject to technical modifications